



THE

DOOR KEEPER

FIRE-RATED DOORS



CLEAN ROOM DOORS



UV PROTECTED



TERMITE PROOF



FIRE RESISTANT



ANTI CORROSIVE



EASY TO INSTALL

ABOUT US

The Door Keeper is a leading manufacturer of high-quality steel doors, specializing in providing durable, secure, and aesthetically pleasing door solutions for residential, commercial, and industrial applications. With a commitment to innovation, craftsmanship, and customer satisfaction, The Door Keeper has established itself as a trusted name in the industry since its inception.

OUR MISSION

Our mission at The Door Keeper is to design and manufacture superior steel door products that exceed industry standards in quality, functionality, and design, while delivering exceptional value and service to our customers.

PRODUCT FEATURES

1. **UV Protected:** Our steel doors are engineered with UV protection to ensure long-lasting color retention and resistance to fading, even in harsh outdoor environments.
2. **Termite Proof:** Utilizing cutting-edge materials and manufacturing techniques, The Door Keeper are guaranteed to be termite-proof, providing peace of mind for homeowners and businesses alike.
3. **Fire Resistant:** Safety is paramount, which is why our doors are built to withstand high temperatures and prevent the spread of fire, offering crucial protection for occupants and property.
4. **Anti-Corrosive:** Our doors feature anti-corrosive coatings and treatments, ensuring resilience against rust and deterioration, even in humid or coastal environments.
5. **Easy to Install:** Designed with ease of installation in mind, The Door Keeper can be quickly and efficiently fitted by professionals, saving time and hassle for builders and contractors.
6. **Available in Different Sizes:** Whether for standard residential doorways or custom industrial entrances, The Door Keeper offers a variety of sizes to accommodate diverse architectural requirements.
7. **Honeycomb Infill:** The door panel is reinforced with Honeycomb /Mineral wool, providing exceptional strength and insulation properties while maintaining a lightweight design.
8. **Galvanized Iron Doors:** Constructed from galvanized iron, our doors boast exceptional durability and longevity, making them suitable for high-traffic areas and harsh environments.



THE DOOR KEEPER



Metal Fire Rated Door

(Single leaf door/ Equal leaf door/ Un-equal leaf door)

Door Type	: Metal Fire Rated Door
Fire Rating	: 120 mins
Shutter Thickness	: 46 mm
Criteria	: Stability, Integrity & With
Insulation	Material
Testing Standards	: BS 476 Part 20-22, IS 3614 Part 2
Frame Size	: 100 x 57mm Single Rebate 143 x 57mm Double Rebate.

Construction Details

- * Steel Frame Profile Design
- * Frame Thickness – 1.20 mm/ 1.60 mm Galvanized Steel
- * Shutter Sheet Thickness – 1.0 / 1.2 mm Galvanized Steel
- * Vision Panel – 2hrs. Fire rated Toughened clear Glass (Optional)
- * Shutter Thickness – 46 mm
- * Shutter Infill Insulation – Fire Rated Insulation
- * Finish powder coated finish in desired shade

Recommended Hardware


1. SS Ball Bearing Hinges – SS 304 of Size 100mm x 75mm x 3mm
2. Door Closer – Fire rated
3. Tower Bolt / Flush Bolt

Optional Hardware

4. Mortise Dead Lock Set with Cylinder- complete with D Shape Pull handle for Push / Pull Operations
5. Mortise Sash Lock with Cylinder – Complete with Lever Handle for Push / Pull Operations
6. Fire Rated Panic Bar – Push Side Operation
- Fire Rated External Panic Trim – Pull Side Operation

Recommended Finishes

1. Powder Coating in desired RAL Shade Code
2. Selective Wood Grain Finishes available

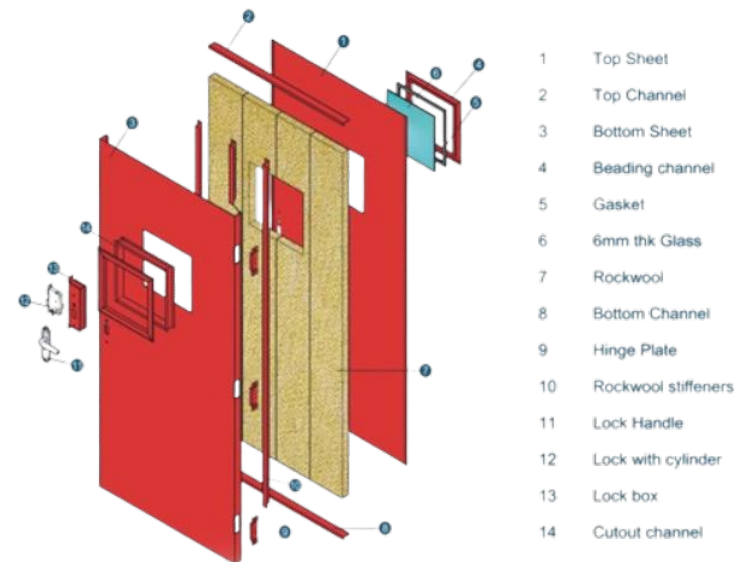

Glazed Metal Fire Rated Door

Door Type	: Glazed Metal Fire Rated Door
Fire Rating	: 60mins/ 120 mins
Door Frame	: 143 X 57 X 1.60 mm
Shutter Thickness	: 50 X 1.60 mm
Shutter Stiles	: Vertical & Top Members 50 X 100 X 1.60 mm
	bottom members 50 X 200 X 1.60 mm
Criteria	: Stability, Integrity & With Insulation
Material	
Testing Standards	: BS 476 Part 20-22, IS 3614 Part 2
Glazings	: Glass – 2hrs. Fire rated clear Glass
Shutter Infill Insulation:	Mineral Wool Insulation




Construction Details

- * Steel Frame Profile Design
- * Frame Thickness – 1.6mm Galvanised Steel
- * Shutter Sheet Thickness – 1.6mm Galvanised Steel
- * Glass – 2hrs. Fire rated clear Glass
- * Shutter Infill Insulation – Mineral Wool Insulation

Recommended Hardwares

1. SS Ball Bearing Hinges – SUS 304 of Size 102mm x 89mm x 3mm
2. Door Closer – Fire rated
3. Tower Bolt / Flush Bolt

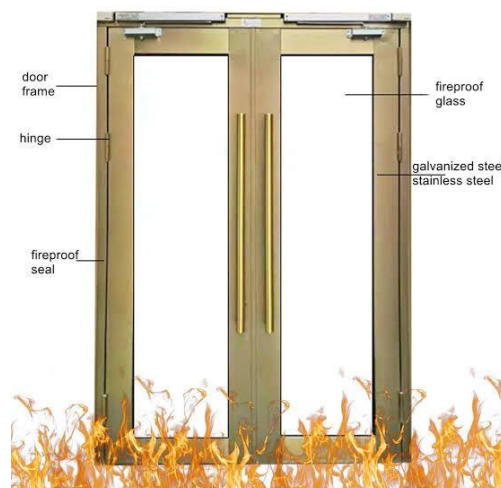

Optional Hardwares

4. Mortise Dead Lock Set with Cylinder- complete with D Shape Pull handle for Push / Pull Operations
5. Mortise Sash Lock with Cylinder – Complete with Lever Handle for Push / Pull Operations
6. Fire Rated Panic Bar – Push Side Operation
- Fire Rated External Panic Trim – Pull Side Operation

Recommended Finishes

1. Powder Coating in desired RAL Shade Code
2. Selective Wood Grain Finishes available



THE DOOR KEEPER

CLEANROOM DOOR




Clean Room Door

Door Type	: Clean Door
Fire Rating	: 120 mins
Shutter Thickness	: 46 mm
Criteria	: Stability, Integrity & With
Insulation	Material
Testing Standards Part 2	: BS 476 Part 20-22, IS 3614 Part 2
Frame Size	: 100 x 57mm Single Rebate 143 x 57mm Double Rebate.

Construction Details

- * Steel Frame Profile Design
- * Frame Thickness – 1.20 mm/ 1.60 mm Galvanized Steel
- * Shutter Sheet Thickness – 1.0 / 1.2 mm Galvanized Steel
- * Vision Panel – 2hrs. Fire rated Toughened clear Glass (Optional)
- * Shutter Thickness – 46 mm
- * Shutter Infill Insulation – Fire Rated Insulation
- * Finish powder coated finish in desired shade

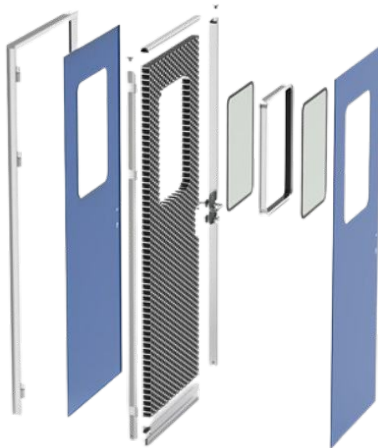

Recommended Hardwares

1. SS Ball Bearing Hinges – SS 304 of Size 100mm x 75mm x 3mm
2. Door Closer – Fire rated
3. Tower Bolt / Flush Bolt

Optional Hardwares

4. Mortise Dead Lock Set with Cylinder- complete with D Shape Pull handle for Push / Pull Operations
5. Mortise Sash Lock with Cylinder – Complete with Lever Handle for Push / Pull Operations
6. Fire Rated Panic Bar – Push Side Operation
- Fire Rated External Panic Trim – Pull Side Operation

Recommended Finishes

1. Powder Coating in desired RAL Shade Code
2. Selective Wood Grain Finishes available



Fire Shaft Door

Door Frame	: 105x70 mm
Door Shutter	: 28 mm Thick (Single Sheeted) Non Fire Rated
Fixing	: Anchor fastener M10X100 mm
Finish	: Powder coated
Vision Panel	: 5 mm Thick Float glass
Door Size.	: 1200X2000 mm



Recommended Hardwares

1. M.S Butt Hinges - 4"x2.5 mm, ISI Marked
2. M.S D-Type Handle
3. Allen Key Lock

Fire hose box

Door Frame	: Angle Iron 40x40x5mm
Door Shutter	: Outer Frame Angle Iron 25x25x3mm With Single Sheeted 2mm Thick M.S. Sheet
Finish	: Powder coated (PO Red)
Vision Glass	: 4/5 mm Thick Float glass



Recommended Hardwares

1. M.S Butt Hinges : 4"x2.5 mm, ISI Marked Concealed Handle
2. Allen Key Lock
3. Fixing - Holdfast / Dash Fastners
4. Door Size. : 1200X2000 mm

Electrical Shaft Doors

Door Frame	: 105x70 mm
Door Shutter	: 28 mm Thick (Single Sheeted)
Fixing	: Anchor fastener M10X100 mm
Finish	: Powder coated
Door Size.	: 1200X2000 mm

Recommended Hardwares

1. M.S Butt Hinges - 4"x2.5 mm, ISI Marked
2. M.S D-Type Handle
3. Allen Key Lock




THE DOOR KEEPER

FR HARDWARE



Flush bolt



SS ball bearing Hinge



SS Pull Handle



Panic Bar



FR Door closer



External Trim



Dead lock

OUR CLIENTS



Address

OFFICE: Shop no. 3/4, near Jaycees Public School, Gangapur Rd, Rudrapur, Uttarakhand 263153

FACTORY: 00, RAMESHWARPUR ROAD TEH. RUDRAPUR, BHARTIYAM INTERNATIONAL SCHOOL, Kichha, Udham Singh Nagar, Uttarakhand, 263148



Contact



Thedoorkeepersteeldoors@gmail.com
Sales@thedorkeeper.in



Thedoorkeeper.in



7060904515, 7500566000, 7500133331